


# Pegasus Floor Scales

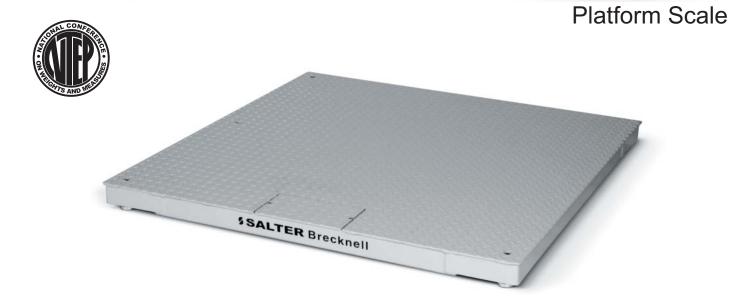

- Rugged Construction

   Up to .25 inch
   (6 mm) thick top plate with heavy duty welded channel support.
- Legal for Trade– All sizes are NTEP certified at 5,000 divisions.
- Low Profile- 3.1 inches high using 1.75" diameter adjustable leveling feet.

- Finish– Powder coat paint.
- Versatile
   Pit mounted or free standing.
- Load Cells Four alloy tool steel potted loadcells.
- Available in Mild Steel or all Stainless Steel Construction



**Pegasus Floor Scales** 

- J-Box Access– Top access for easy installation and service
- Leveling Feet– Four top access holes for a quick installation
- Threaded Eye Bolts– Two threaded top access eye-bolt holes for easy mobility and pit service

# **Capacities & Resolution**

TER

Capacity	Model	Dimension-in.	Dimension-cm
2,000 x 5 lb (1000 x .2 kg)	DCSB3636-02	36 x 36 x 3.1	91 x 91 x 7.9
5,000 x 1 lb	DCSB3636-05	36 x 36 x 3.1	91 x 91 x 7.9
(2500 x .5 kg)	DCSB4848-05	48 x 48 x 3.1	122 x 122 x 7.9
	DCSB6048-05	60 x 48 x 3.1	152 x 122 x 7.9
	DCSB7248-05	72 x 48 x 3.1	183 x 122 x 7.9
	DCSB6060-05	60 x 60 x 3.1	152 x 152 x 7.9
10,000 x 2 lb	DCSB4848-10	48 x 48 x 3.1	122 x 122 x 7.9
(5000 x 1 kg)	DCSB6048-10	60 x 48 x 3.1	152 x 122 x 7.9
	DCSB7248-10	72 x 48 x 3.1	183 x 122 x 7.9
	DCSB6060-10	60 x 60 x 3.1	152 x 152 x 7.9

ALL capacities and resolutions shown above are based on 5000d.

## **Rugged Construction**



Wide channel design for superior durability

**Corner Protection**– Closed corners to prevent damage to leveling feet while installing the scale

## **General Floor Scale Specifications**

#### Platform Material-

Construction: Mild steel .25 inch deck with safety tread, 10K (4' x 6'; 4' x 5'; 5' x 5') .19 inch deck with safety tread, 2 - 5K (3' x 3'; 4' x 4')

Finish- Powder coat paint

J-Box Construction– ABS plastic

Loadcell Material- Alloy tool steel potted

Loadcell Rated Output- 3 mv/V

Loadcell Output Resistance- 350 ohm

Overload Protection- 150% of rated capacity

End Loading- 100% of rated capacity

**Temperature**– 14 to 104° F (-10 to 40° C)

Accuracy- NTEP at 5000 divisions, Class III.

Certifications-

NTEP COC #02-070.

#### **Options**

- **Ramps** Up to four ramps can be used with the Pegasus family.
- Indicators– The Pegasus can be used with a variety of electronic indicators.

Pit Frames- Mild steel frames

Indicator Stand– 48" high, mild steel, powder coat painted, for the Salter Brecknell 200E, 200ES, 750 or 750S Indicator. Includes stand, mounting hardware and floor mount baseplate.

#### Salter Brecknell Weighing Products



a division of Avery Weigh-Tronix 1000 Armstrong Dr. Fairmont, MN 56031 Toll free: 800-637-0529 Tel: 507-238-8702 Fax: 507-238-8271 e-mail: sales@salterbrecknell.com www.salterbrecknell.com